

■ ANSI/ANS-5.1-2014, *Decay Heat Power in Light Water Reactors* (revision of ANSI/ANS-5.1-2005).

*Inquiry, Part 1:* Why are the results of the fission product decay heat power ( $P'd$ ) between ANSI/ANS-5.1-2005 (withdrawn), *Decay Heat Power in Light Water Reactors*, and ANSI/ANS-5.1-2014 (same title) different?

*Response, Part 1:* This question pertains to a standard that has been withdrawn. It refers to ANSI/ANS-5.1-2005 (withdrawn), not the current standard, ANSI/ANS-5.1-2014. Implementation of ANSI/ANS-5.1-2005 (withdrawn) could be impacted by round-off error. In the 2014 standard, although the basic data were not changed, the recommended implementation was revised to prevent this

problem. The 2005 standard was found to be obsolete, and it was administratively withdrawn in 2014. The 2005 version of this standard is no longer maintained. The methods in ANSI/ANS-5.1-2005 (withdrawn) that are subject to potential round-off error are no longer the recommended approach. The round-off issue is discussed on page 25 of ANSI/ANS-5.1-2014.

*Inquiry, Part 2:* Is the deviation of uncertainty equations of the standards different with the overall root-mean-square (RMS) equation? An earlier work<sup>1</sup> had compared several uncertainty equations

<sup>1</sup> "Decay Heat Changes to 50.46 and Appendix K," Attachment 1, available at <[www.nrc.gov/docs/ML0217/ML021720702.pdf](http://www.nrc.gov/docs/ML0217/ML021720702.pdf)>

of the standard, ANSI/ANS-5.1-1994 (withdrawn), with similar RMS equations. Please confirm that equations (8) and (12) of ANSI/ANS-5.1-2014 don't use RMS equations.

*Response, Part 2:* This question appears to be limited to the RMS implementation of uncertainty. The RMS approach has never been adopted in the ANS decay heat standard (ANS-5.1) due to potential correlations between the decay heat terms. We can, therefore, confirm that equations (8) and (12) of ANSI/ANS-5.1-2014 do not use RMS equations. The RMS approach is similarly not used in International Organization of Standardization (ISO) standard ISO 10645:1992, *Nuclear Energy—Light Water Reactors—Calculation of the Decay Heat Power in Nuclear Fuels*. **IN**

## ANSI/ANS-57.3-2018

### Design Requirements for New Fuel Storage Facilities at Light Water Reactor Plants

Supersedes ANSI/ANS-57.3-1983

This standard defines the required functions of dry storage facilities for new fuel at light water reactor nuclear power plants. It provides minimum design requirements for safe storage of new nuclear fuel and control components at such plants. The fuel storage facilities covered by this standard are used for receiving, inspecting, and storing fuel containing new and recycled uranium and mixed oxides.

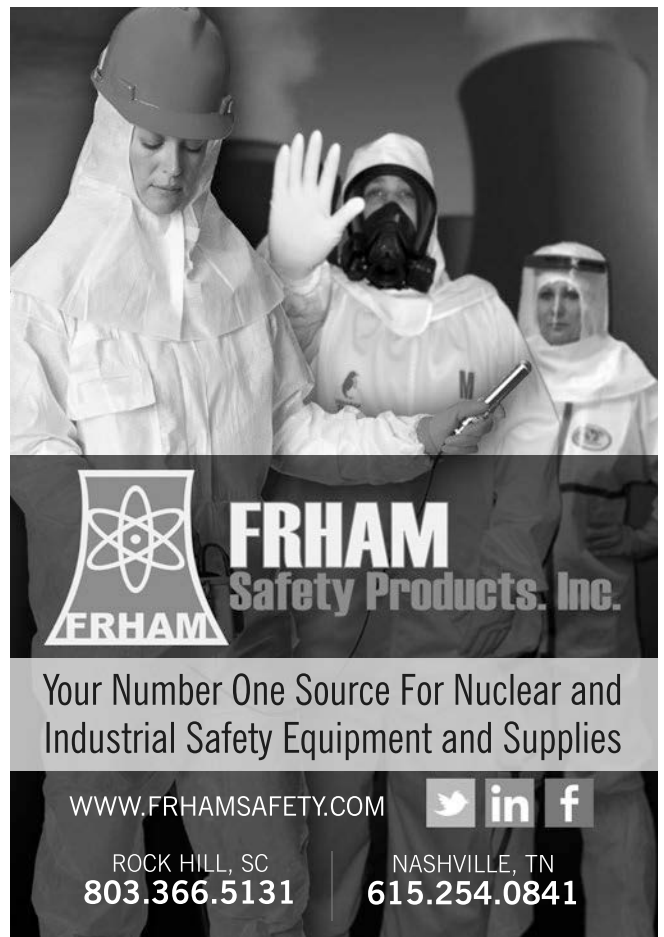
Contact ANS for this standard and for a complete list of standards developed by the ANS Standards Committee.

Print and electronic copies are available in the ANS Store: [www.ans.org/store](http://www.ans.org/store)

**\$86.00**      **Order #: 240322**




#### American Nuclear Society

555 N. Kensington Avenue  
La Grange Park, IL 60526  
Phone: 708/579-8269  
Email: [standards@ans.org](mailto:standards@ans.org)



**FRHAM**  
Safety Products, Inc.

Your Number One Source For Nuclear and Industrial Safety Equipment and Supplies

[WWW.FRHAMSAFETY.COM](http://WWW.FRHAMSAFETY.COM)   

ROCK HILL, SC      NASHVILLE, TN  
**803.366.5131**      **615.254.0841**